

FEATURES

- **Ultra-Dependable**
- **More sensitive than a float**
- **Low Profile Sensor**
- **Simple Installation**
- **Low Power Consumption**
- **Almost No Maintenance**
- **Probes Will Not Rust or Corrode**
- **Patented Sensing Process**
- **Economically Priced**
- **3-Year Limited Warranty**
- **No Moving Parts**

Sensitize!

Simplify!

The *Level Waters™ EasyFill™* is designed to give you the peace of mind that electronic autofills offer over float valves at a **fraction of the cost** of professional units. No other system offers the value of the **EasyFill™**. It's the **only one** like it available! The system sensor probes **will not rust or corrode** and are **easy to clean**. Other system sensors break down and require frequent replacements. With no moving parts, it will save money and time and last for years to come.

For further information visit us on the web at www.AquilitySystems.com, contact your local distributor or send us an email at: info@aquilitysystems.com.

Available Systems

- ✚ MLS-3401 – ¾" valve 15gpm
- ✚ MLS-1002 – 1" valve 30gpm
- ✚ MLS-34EU European Model – 240v 50 Hz BSP valve connections
- ✚ MLX-45 – 24VAC Class 2 Power Supply and MC-01. No valve. Add CP to model for contractor pack



Aquility Systems, Inc.
6949 SW 21st Ln.
Gainesville, FL 32607
www.AquilitySystems.com

Available from:




Get The Floatless Advantage

With The

EasyFill™

By Aquility Systems, Inc.

Miniature Electronic Auto-fill System

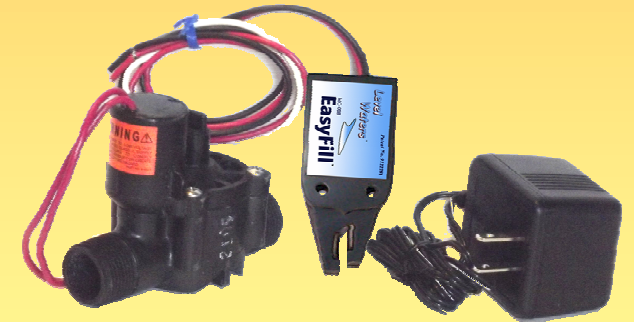

FILL'ER UP!


The Final Frontier In Auto-Fills!

Level Waters™ Automatic Water Leveling Systems provide dependable electronic filling for your pond or water garden. Designed to solve the problems associated with float-style valves, the systems' proven technology maintains the level in your water feature even when small leaks exist without moving parts! They can even be used as a water replenishment system so that your water stays fresh and crystal clear.

How The System Works


The **Level Waters™ EasyFill™** System uses a patented sensing circuit that monitors water level 24 hours a day. The low-profile sensor is placed either on the side of the pond or water-feature in an inconspicuous location, or in a skimmer at the desired water level. It can be easily adjusted for small changes in height using one of three optional mounts (lower right).

The MC-01B sensor is connected to a valve and power supply and operates together as follows:

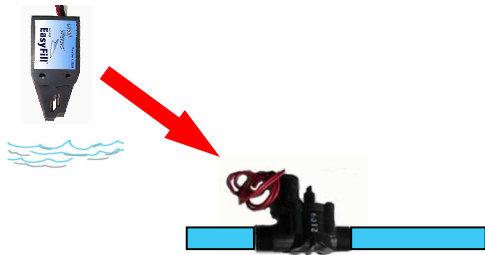

When the water level falls below the sensor window, the sensor sends a signal to the valve to start the fill cycle. The valve turns on and begins to fill.

Once the water level reaches the sensor probes, the sensor sends a signal to the valve that the water is where it should be and the valve turns off stopping the fill cycle.

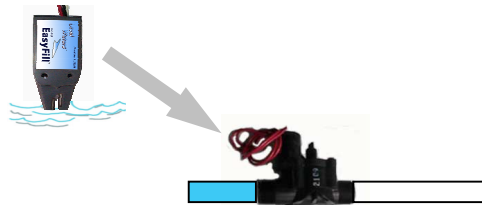


Don't count on unreliable float valves!

Almost No Maintenance

Other than periodically cleaning the sensor probes off with the included wire brush, The **EasyFill™** requires almost no maintenance; just mount and enjoy the benefits of an automated filling system at a fraction of the cost of professional electronic auto-fills.

Installation Is Simple

Level Waters™ EasyFill™ System is easy to install. All wires have pre-stripped insulation and the simple connections are made with easy to install wire nuts. Simple plumbing is needed to run water to the valve and the pond or water-feature. Anyone can do it. Various mounts are available for every need.

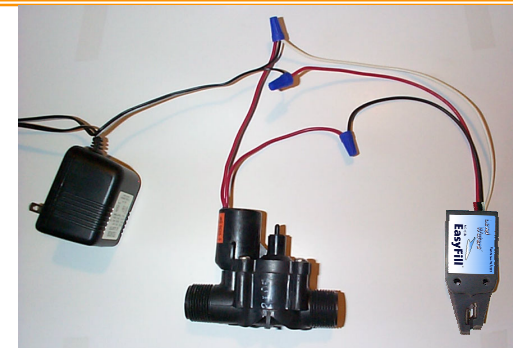

**MNT-SK
SKIMMER MOUNT**



**MNT-EZ/SL
SLIDE MOUNT**



**MNT-EZ
ADJUSTABLE MOUNT**



Check out our product literature at www.aquilitysystems.com or contact your local retailer to find out which system best fits your needs.